

Cielo 17" Performance

17" Bezel-Free EPoS Terminal




Box is proud to announce the cielo 17" all-in-one multi-touch EPoS system


The new cielo all-in-one combines impressive styling with an ultra-slim display, sleek chassis and a compact footprint making it ideal for any retail environment. The cielo performance boasts a powerful Intel Core i3 or Core i5 processor which makes it particularly suitable for demanding environments or complicated data processing tasks.

Features

- Flexible I/O connectivity for new peripherals - A second optional I/O slot is available which offers 5 types of I/O modules to meet the widest range of project and usage requirements.
- One step quick replacement of key components for easy upgrades. - The hardware platform may be easily upgraded by swapping key components such as the motherboard and hard disk drives.
- Ultra-slim magnetic stripe reader module - Additional devices such as mag-stripe reader, RFID button and fingerprint reader may be attached to the unit. The dedicated MSR measures a miserley 1cm in thickness.
- Flexible mounting options - A stand is provided however it is easily to remove, providing flexible mounting options to meet your individual retail needs.

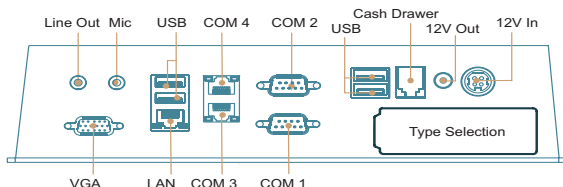

Alternative configurations available.

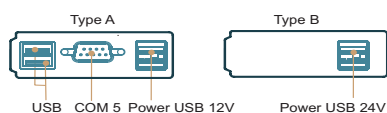

Model	AP-3617
Processor	Intel® Celeron® G540, 2.5Ghz Intel® Core i3-2120, 3.3Ghz Intel® Core i5-3550S, 3.0Ghz
System Memory	2GB Standard, Maximum 8GB (1x204-pin DDR3)
"Power Supply"	150W (12V / 12.5A) External Power Supply
Storage Device	1 x 2.5" SATA HDD
Chipset	Intel® H61
Speaker	Internal Speaker 2W x 2
Construction	Aluminum Die-casting + Plastic + Glass
Housing Color	Black
Touch LCD Display	
Size / Resolution	17" TFT-LCD/ 1280 X 1024
Brightness (Backlight Type) & Touch Screen	250 cd/m2 (LED); 5-Wire Resistive Touch 250 cd/m2 (LED); Projected Capacitive Touch
I/O Ports	
Serial Port	4 x External: COM 1, COM 2 (DB9), COM 3, COM 4 (RJ-45)
"USB Port"	5 x External (4 Rear + 1 Side)
Cash Drawer Port	1 x RJ11 (12V)
LAN Port	1 x RJ45 Giga LAN
Audio Port	1 x Line Out, 1 x Mic In
VGA Port	1 x VGA
DC Output	1 x 12V DC Jack 2.5 mm
Optional I/O Board	
Type D	1x12v & 1x24v Powered USB, 1x Mic in
OS Supported	
Windows	Windows XP, POSReady 2009, Windows 7, POSReady 7, Windows Embedded 8
Linux	Per Request
Physical Dimensions	
Dimensions (W x H x D)	409.8 x 385.9 x 222 mm
Environment	
EMI / Safety	CE, FCC Class A
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	-10°C ~ 55°C (14°F ~ 131°F)
Relative Humidity	10% ~ 90% (Non-condensing)"
Optional Peripherals	
Magnetic Stripe Card Reader	Integrated MCR Module (Single / Dual / Triple Track Selectable)
2nd Display	Integrated 11.6" or 15" LCD Display (Touch Screen Support for 15" Only)
Customer Display	Integrated LCM / VFD Customer Display
Wireless LAN	Integrated 802.11 b/g/n Wireless Module
Identification Devices	RFID 13.56 MHz / Fingerprint Reader / i-Button
Customer Display	Integrated LCM / VFD Customer Display
Wireless LAN	Integrated 802.11 b/g/n Wireless Module
Identification Devices	RFID 13.56 MHz / Fingerprint Reader / i-Button